
APPROVED: Jim Hackworth
DIRECTOR OF PUBLIC WORKS

NOTES:

- 1. STREET ROAD NAME SIGN PANELS SHALL BE 6061—T6 OR 5155—H36, ALUMINUM ALLOY, 0.080" THICK. PANELS SHALL HAVE SQUARE CORNERS AND BE 9" HIGH BY 24", 30", 36", 42" OR 48" LONG, DEPENDING ON STREET NAME LENGTH. COLOR SHALL BE REFLECTIVE WHITE LETTERS ON A REFLECTIVE GREEN BACKGROUND. MATERIALS AND METHODS SHALL CONFORM TO CALTRANS "SPECIFICATIONS FOR REFLECTIVE SHEETING ON ALUMINUM HIGHWAY SIGNS", AND FEDERAL SPECIFICATION L—S—300.
- 2. REFLECTIVE SHEETING FOR THE WHITE LETTERS AND GREEN BACKGROUND SHALL BE "SCOTCHLITE" SILVER "HIGH INTENSITY REFLECTIVE SHEETING".
- 3. THE BACKGROUND SHALL BE "SCOTCHLITE"
 GREEN "ELECTRO CUT FILM", OR SILK
 SCREENED WITH THE MANUFACTURERS
 RECOMMENDED GREEN TRANSPARENT INK.
 THE "ELECTRO CUT FILM", IF USED, SHALL
 HAVE THE LETTERS CUT FROM THE FILM AND
 THE FILM OVERLAID ON THE SILVER
 SHEETING.
- 4. SIGNS FOR LOCATIONS ABOVE 3000'
 ELEVATION SHALL HAVE THE TOP EDGE
 BANDED WITH "SCOTCHLITE PROTECTIVE
 OVERLAY FILM", SERIES 1150 OR EQUIVALENT.
- 5. ROAD NAME LETTERING SHALL BE 6" SERIES "B". STREET NAME DESIGNATIONS SHALL BE 3" SERIES "B" LETTERING AND ABBREVIATED AS SHOWN. LEGENDS SHALL BE 1" SERIES "C" LETTERING. ALL LETTERING SHALL BE HIGHWAY GOTHIC MOD B FED KERN REVA.
- 6. 4"X4" POST, REDWOOD OR TREATED WOOD, CONFORMING TO SEC. 56-2.02B OF CALTRANS STANDARD SPECIFICATIONS.
- 7. FOR COUNTY MAINTAINED ROADS "COUNTY OF PLACER". FOR PRIVATELY MAINTAINED ROADS LEAVE BLANK.

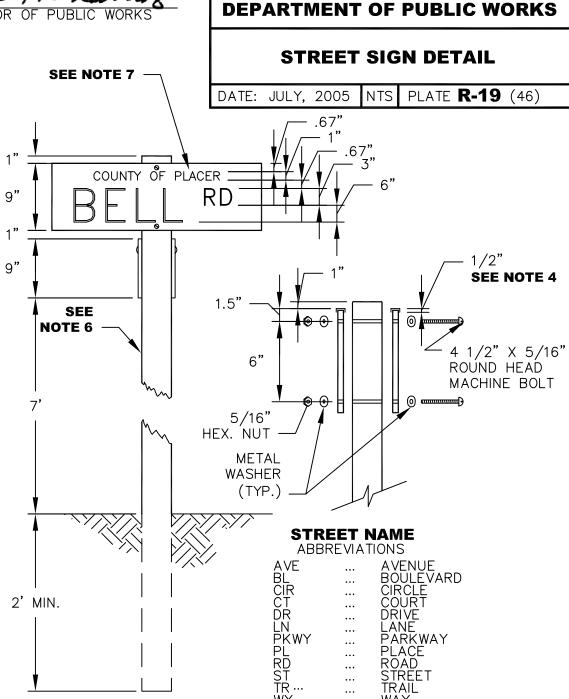

COUNTY OF PLACER